

UA 150 / * / * / * / *

Feed options

P = Pneumatic
H = Hydraulic
CN = Servomotor

LC - Centralized lubrication




Covers

01 = Telescopic / Metallic
02 = Telescopic / Bellows cover
03 = Without covers


Controlled feed

for pneumatic only



01 = 25 mm
02 = 50 mm
03 = 75 mm

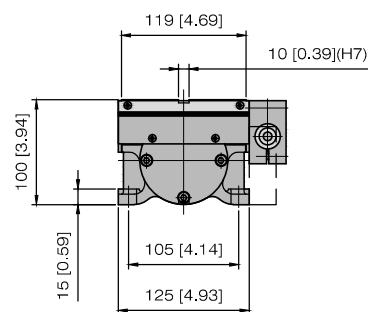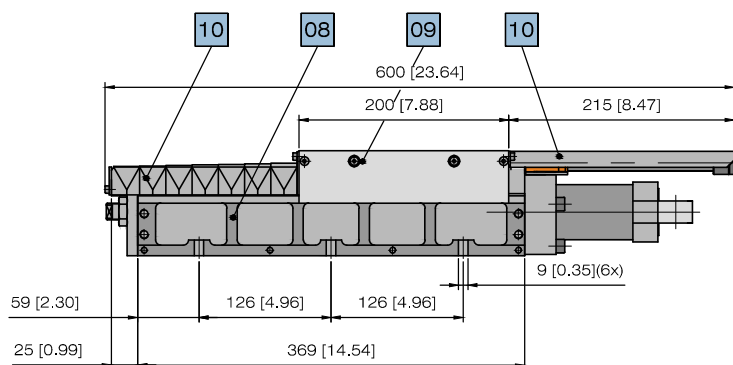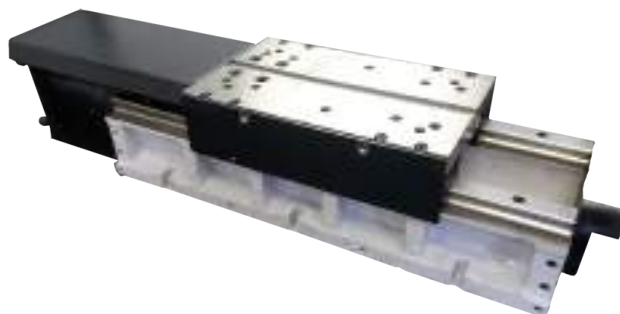

Servomotor

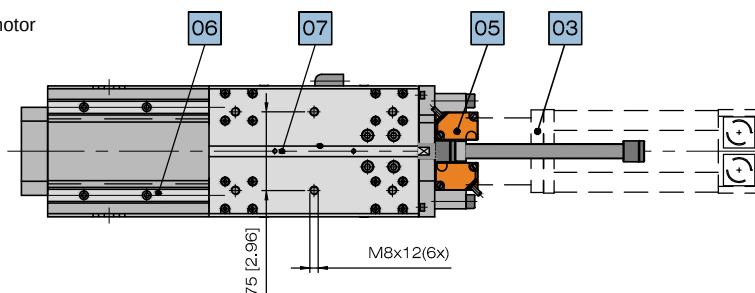

Pneumatic / Hydraulic

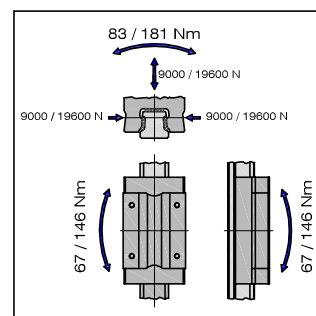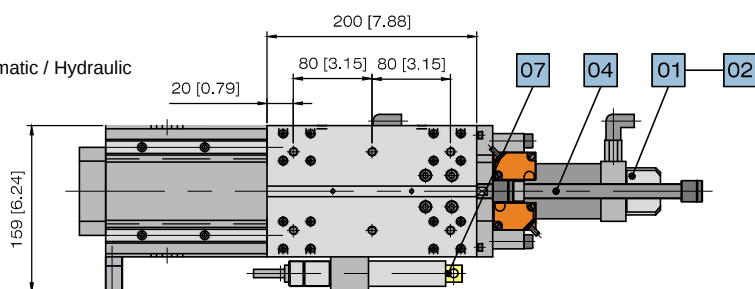

(Dimensions between brackets in inches)

Slide unit UA150

- Cast iron base with 4 preloaded, high precision linear bearings
- Pneumatic feed with built in pneumatic cylinder and slow feed through a hydraulic brake cylinder
- Hydraulic feed
- Servomotor feed.

TECHNICAL DATA	
Model	U150
Total stroke	5.9" (150 mm)
Feed	Pneumatic
Thrust at 90 PSI	1150 N
Feed	Hydraulic
Thrust at 450 PSI	1500 N
Feed	Servomotor
Thrust (2.7 NM servomotor)	2100N
Accuracy	16 µ / 200 mm
Weight	18 kg

FEATURES	
01	Pneumatic cylinder ø 50 mm
02	Hydraulic cylinder ø 25 mm
03	Servomotor (optional)
04	Mechanical stop
05	Inductive sensors
06	Linear bearings
07	Hydraulic brake cylinder
08	Cast iron base
09	Lubrication nipple
10	Cover

Drillmaster reserves the right to modify characteristics without notice

DRILLMASTER INDÚSTRIA E COMÉRCIO DE MÁQUINAS LTDA. - EPP

Rua Alfredo Bernardo Leite, 727 - Vila Santa Luzia - São Bernardo do Campo - SP - CEP: 09670-000